

## SURFACE MOUNT SWITCHING DIODES

BAV19W, BAV20W, BAV21W

SOD-123

Formed SMD Package



**Marking: As indicated below with cathode band**

**Marking**

BAV19W - WY

BAV20W - WZ

BAV21W - JX

**Fast Switching Speed Diodes**

**ABSOLUTE MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ )**

DESCRIPTION	SYMBOL	BAV19W	BAV20W	BAV21W	UNIT
Non Repetitive Peak Reverse Voltage	$V_{RM}$	120	200	250	V
Repetitive Peak Reverse Voltage	$V_{RRM}$	100	150	200	V
Working Peak Reverse Voltage	$V_{RWM}$	100	150	200	V
RMS Reverse Voltage	$V_{R(RMS)}$	71	106	141	V
DC Blocking Voltage	$V_R$	100	150	200	V
Average Rectified Output Current	$I_O$	200			mA
Forward Continuous Current	$I_{FM}$	400			mA
Repetitive Peak Forward Surge Current	$I_{FRM}$	625			mA
Non Repetitive Peak Forward Surge Current	$I_{FSM}$				
at $t=1\text{ms}$		2.5			A
at $t=1\text{s}$		0.5			A
Power Dissipation	$P_D$	250			mW
Junction Temperature	$T_j$	- 65 to +150			$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 65 to +150			$^\circ\text{C}$

### THERMAL RESISTANCE

Junction to Ambient in free air	$R_{th(j-a)}$	500	$^\circ\text{C/W}$
---------------------------------	---------------	-----	--------------------

### ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$ unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	Min	Typ	Max	UNIT
Reverse Breakdown Voltage	$V_{(BR)R}$	at $I_R=100\mu\text{A}$ BAV19W BAV20W BAV21W	120 200 250			V V V
Reverse Current	$I_R$	at Rated DC Blocking Voltage at $T_j=25^\circ\text{C}$ at $T_j=100^\circ\text{C}$			100 15	nA $\mu\text{A}$
Forward Voltage	$V_F$	$I_F=100\text{mA}$ $I_F=200\text{mA}$			1.0 1.25	V V

BAV19W\_BAV21W Rev040805E

SURFACE MOUNT SWITCHING DIODES

BAV19W, BAV20W, BAV21W




SOD-123  
Formed SMD Package

ELECTRICAL CHARACTERISTICS (T<sub>a</sub>=25° C unless specified otherwise)


DESCRIPTION	SYMBOL	TEST CONDITION	Min	Typ	Max	UNIT
Total Capacitance	C <sub>T</sub>	V <sub>R</sub> =0V, f=1MHz			5	pF
Reverse Recovery Time	T <sub>rr</sub>	at I <sub>F</sub> = I <sub>R</sub> =30mA, I <sub>RR</sub> =0.1X I <sub>R</sub> , R <sub>L</sub> =100Ω			50	ns

BAV19W\_BAV21W Rev040805E

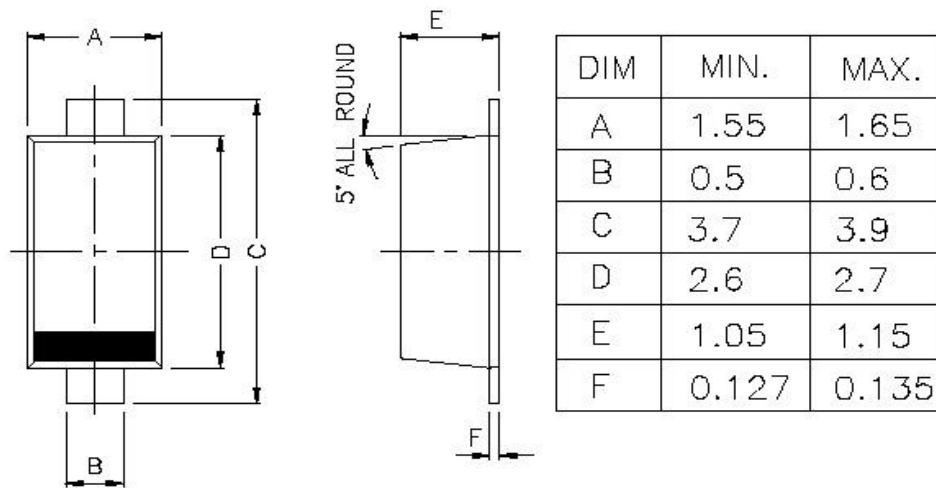PACKAGE SOD-123 FL

All dimensions are in mm

CATHODE IS MARKED BY BAND

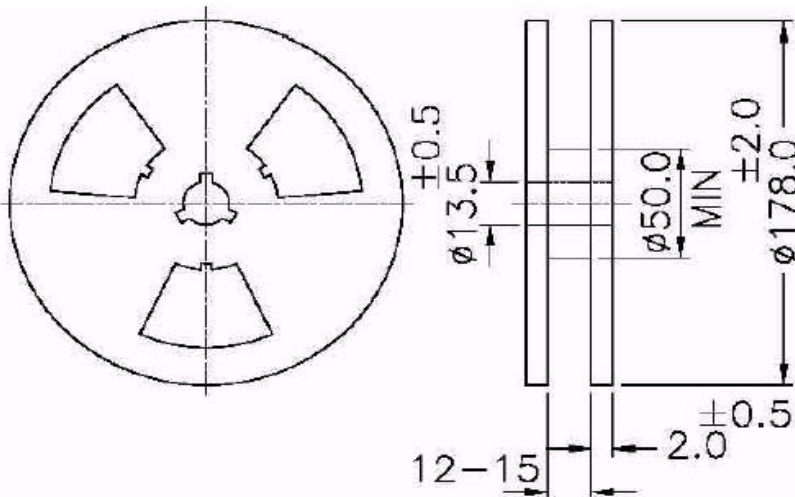

ALL DIMENSIONS ARE IN mm  
 REEL  $\phi$  178 mm (7")  
 3000 Pcs / REEL

**Component Disposal Instructions**

1. CDIL Semiconductor Devices are RoHS compliant, customers are requested to please dispose as per prevailing Environmental Legislation of their Country.
2. In Europe, please dispose as per EU Directive 2002/96/EC on Waste Electrical and Electronic Equipment (WEEE).

**Disclaimer**

The product information and the selection guides facilitate selection of the CDIL's Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of  
Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.

Telephone + 91-11-2579 6150, 4141 1112 Fax + 91-11-2579 5290, 4141 1119

email@cdil.com www.cdilsemi.com