



SURFACE MOUNT ZENER DIODES **(Equivalent to 1W 1N47XX Series)**

CZ1W 4.7 to 47V **SOT-23**



ABSOLUTE MAXIMUM RATINGS (Ta=25 deg C unless otherwise specified)

DESCRIPTION	SYMBOL	VALUE	UNIT
Working Voltage Range	VZ	4.7- 47V	V
Working Voltage Tolerance		+/- 5	%
Power Dissipation	Ptot	600	mW
Operating & Storage Junction Temperature Range	Tj,Tstg	-55 to +150	deg C
Thermal Resistance			
Junction to Ambient#	Rth j-a	430	K/W
Junction to Ambient##	Rth j-a	500	K/W

ELECTRICAL CHARACTERISTICS(Ta=25 deg C Unless otherwise Specified)

VF<1.5V @ 200mA

CZ1W 4.7- 47V	Working Voltage		Differential Resistance		Reverse Current		Temp	Differential	MARKING	
					IR		Coeff of	Resistance		
	VZ(V) \$		(mA)	rdiff(ohms)			Zener Voltage	rdiff(ohms)		
	(min)	(max)	(IZT)	(max)	(uA)	(V)	(TYP)	(max)	(IZ)	(mA)
CZ1W 4.7	4.4	- 5.0	53	8.0	10	1.0	- 0.01	500	1.0	4Z7
CZ1W 5.1	4.8	- 5.4	49	7.0	10	1.0	0.01	550	1.0	5Z1
CZ1W 5.6	5.2	- 6.0	45	5.0	10	2.0	0.03	600	1.0	5Z6
CZ1W 6.2	5.8	- 6.6	41	2.0	10	3.0	0.04	700	1.0	6Z2
CZ1W 6.8	6.4	- 7.2	37	3.5	10	4.0	0.05	700	1.0	6Z8
CZ1W 7.5	7.0	- 7.9	34	4.0	10	5.0	0.05	700	0.5	7Z5
CZ1W 8.2	7.7	- 8.7	31	4.5	10	6.0	0.06	700	0.5	8Z2
CZ1W 9.1	8.5	- 9.6	28	5.0	10	7.0	0.06	700	0.5	9Z1
CZ1W 10	9.4	- 10.6	25	7.0	10	7.6	0.07	700	0.25	10Z
CZ1W 11	10.4	- 11.6	23	8.0	5.0	8.4	0.07	700	0.25	11Z
CZ1W 12	11.4	- 12.7	21	9.0	5.0	9.1	0.07	700	0.25	12Z
CZ1W 13	12.4	- 14.1	19	10	5.0	9.9	0.07	700	0.25	13Z
CZ1W 15	13.8	- 15.6	17	14	5.0	11.4	0.08	700	0.25	15Z
CZ1W 16	15.3	- 17.1	15.5	16	5.0	12.2	0.08	700	0.25	16Z
CZ1W 18	16.8	- 19.1	14	20	5.0	13.7	0.08	750	0.25	18Z
CZ1W 20	18.8	- 21.2	12.5	22	5.0	15.2	0.08	750	0.25	20Z
CZ1W 22	20.8	- 23.3	11.5	23	5.0	16.7	0.08	750	0.25	22Z
CZ1W 24	22.8	- 25.6	10.5	25	5.0	18.2	0.08	750	0.25	24Z
CZ1W 27	25.1	- 28.9	9.5	35	5.0	20.6	0.09	750	0.25	27Z
CZ1W 30	28.0	- 32.0	8.5	40	5.0	22.8	0.09	1000	0.25	30Z
CZ1W 33	31.0	- 35.0	7.5	45	5.0	25.1	0.09	1000	0.25	33Z
CZ1W 36	34.0	- 38.0	7,0	50	5.0	27.4	0.09	1000	0.25	36Z
CZ1W 39	37.0	- 41.0	6.5	60	5.0	29.7	0.09	1000	0.25	39Z
CZ1W 43	40.0	- 46.0	6.0	70	5.0	32.7	0.09	1500	0.25	43Z
CZ1W 47	44.0	- 50.0	5.5	80	5.0	35.8	0.09	1500	0.25	47Z


#Device mounted on a cermet alumna.

##Device mounted on an FR5 printed circuit board

\$Pulse Test 20ms=tp=50ms

SOT-23 Package Reel Information

Reel specifications for Packing (13"/7" reels)

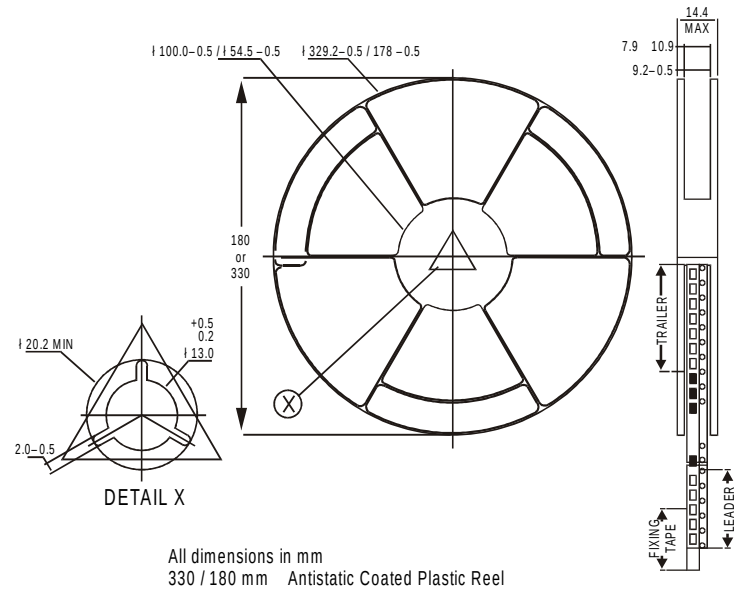

- | NOTES: | | 8mm Tape
Size of Reel
330 mm (13")
10,000 Pcs | 8mm Tape
Size of Reel
180 mm (7")
3,000 Pcs |
|----------------|--|--|--|
| No. of Devices | | | |
- The bandolier of 330 mm reel contains at least 10,000 devices.
 - The bandolier of 180 mm reel contains at least 3,000 devices.
 - No more than 0.5% missing devices / reel. 50 empty compartments for 330 mm reel. 15 empty compartments for 180 mm reel.
 - Three consecutive empty places might be found provided this gap is followed by 6 consecutive devices.
 - The carrier tape (leader) starts with at least 75 empty positions (equivalent to 330 mm). In order to fix the carrier tape a self adhesive tape of 20 to 50 mm is applied. At the end of the bandolier at least 40 empty positions (equivalent to 160 mm) are there.

[illegible]

Packing Detail

PACKAGE	STANDARD PACK		INNER CARTON BOX		OUTER CARTON BOX		
	Details	Net Weight/Qty	Size	Qty	Size	Qty	Gr Wt
SOT-23 T&R	3K/reel	136 gm/3K pcs	3" x 7.5" x 7.5"	12.0K	17" x 15" x 13.5"	192.0K	12 kgs
			9" x 9" x 9"	51.0K	19" x 19" x 19"	408.0K	28 kgs
	10K/reel	415 gm/10K pcs	13" x 13" x 0.5"	10.0K	17" x 15" x 13.5"	300.0K	16 kgs

Customer Notes

Component Disposal Instructions

1. CDIL Semiconductor Devices are RoHS compliant, customers are requested to please dispose as per prevailing Environmental Legislation of their Country.
2. In Europe, please dispose as per EU Directive 2002/96/EC on Waste Electrical and Electronic Equipment (WEEE).

Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Discrete Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of
Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.

Telephone + 91-11-2579 6150, 4141 1112 Fax + 91-11-2579 5290, 4141 1119

email@cdil.com www.cdilsemi.com