


3-TERMINAL 1A POSITIVE ADJUSTABLE VOLTAGE REGULATOR

LM317

TO-220

Plastic Package

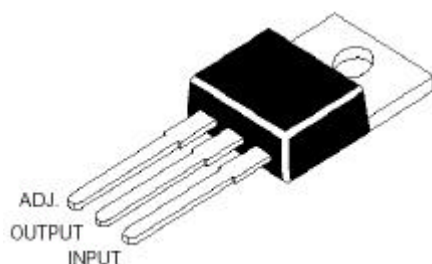

APPLICATIONS

The voltages available allow these Regulators to be used in Logic Systems, Instrumentation, Hi-Fi Audio Circuits and other Solid State Electronic Equipment

FEATURES

Internal Short Circuit Protection and Internal Over Temperature Protection

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

DESCRIPTION	SYMBOL	VALUE	UNIT
Input Output Voltage Difference	$V_I - V_O$	40	V
Lead Temperature	T_{lead}	230	$^\circ\text{C}$
Power Dissipation	P_D	Internal Limited	
Operating Temperature Range	T_{amb}	0 ~ 125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 65 ~150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS


$V_I - V_O = 5\text{V}$, $0^\circ\text{C} < T_J < 125^\circ\text{C}$, $I_O = 500\text{mA}$, (Max=1.5A, $P_{\text{max}}=20\text{W}$, unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Line Regulation	ΔV_O	$T_a = 25^\circ\text{C}$, $3\text{V} \leq V_I - V_O \leq 40\text{V}$			0.04	%/V
		$T_a = 0 \sim 125^\circ\text{C}$, $3\text{V} \leq V_I - V_O \leq 40\text{V}$			0.07	%/V
Load Regulation	ΔV_O	$T_a = 25^\circ\text{C}$, $V_O \leq 6\text{V}$			25	mV
		$10\text{mA} \leq I_O \leq I_{\text{MAX}}$, $V_O \geq 5\text{V}$			0.5	%/V
		$10\text{mA} \leq I_O \leq I_{\text{MAX}}$, $V_O \leq 5\text{V}$			70	mV
Adjustable Pin Current	I_{ADJ}	$V_O \geq 6\text{V}$			1.5	%/V
Adjustable Pin Current Change	ΔI_{ADJ}	$2.5\text{V} \leq V_I - V_O \leq 40\text{V}$, $10\text{mA} \leq I_O \leq I_{\text{MAX}}$, $P_D \leq P_{\text{MAX}}$			100	μA
Reference Voltage	V_{REF}	$3\text{V} \leq V_I - V_O \leq 40\text{V}$, $10\text{mA} \leq I_O \leq I_{\text{MAX}}$, $P_D \leq P_{\text{MAX}}$	1.2		1.3	V
Temperature Stability	S_{TT}			0.7		%/V
Minimum Load Current for Regulation	$I_{\text{L(min)}}$	$V_I - V_O = 40\text{V}$			10	mA

LM317Rev110205E

3-TERMINAL 1A POSITIVE ADJUSTABLE VOLTAGE REGULATOR

LM317

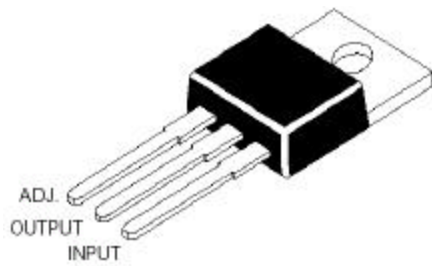

TO-220

Plastic Package

ELECTRICAL CHARACTERISTICS



$V_I - V_O = 5V$, $0^\circ C < T_J < 125^\circ C$, $I_O = 500mA$, (Max=1.5A, $P_{max} = 20W$, unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Maximum Output Current	$I_{O(max)}$	$V_I - V_O = 15V$, $P_D \leq P_{MAX}$	1.5			A
		$V_I - V_O = 40V$, $P_D \leq P_{MAX}$, $T_a = 25^\circ C$	0.15			A
RMS Noise V.S% of V_{out}	eN	$T_a = 25^\circ C$, $10Hz \leq f \leq 10KHz$			0.01	%/VO
Ripple Rejection	R_R	$V_O = 10V$, $f = 120Hz$		60		dB
		$V_O = 10V$, $f = 120Hz$, $C_{ADJ} = 10\mu F$	66			dB
Long Term Stability, $T_J = T_{HIGH}$	S_T	$T_a = 25^\circ C$, 1000hr			1.0	%
Junction to Case Thermal Resistance	$R_{th(j-c)}$			5.0		$^\circ C/W$

Note: Testing with low duty pulse should be used to avoid heating effect

LM317Rev110205E


TO-220 Plastic Package

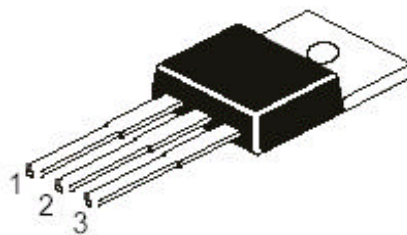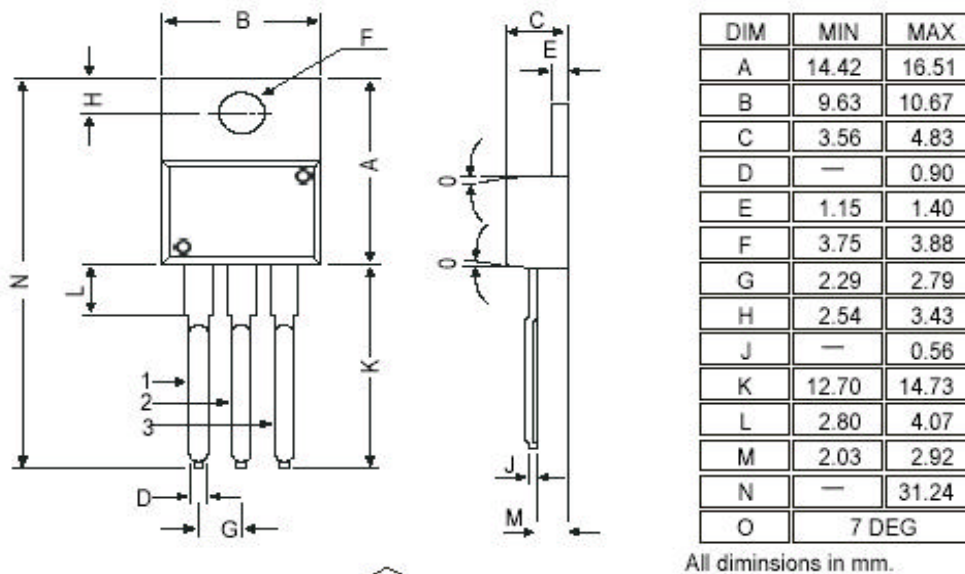


Pin Configuration

1. ADJ.
2. OUTPUT
3. INPUT

TO-220 Tube Packing

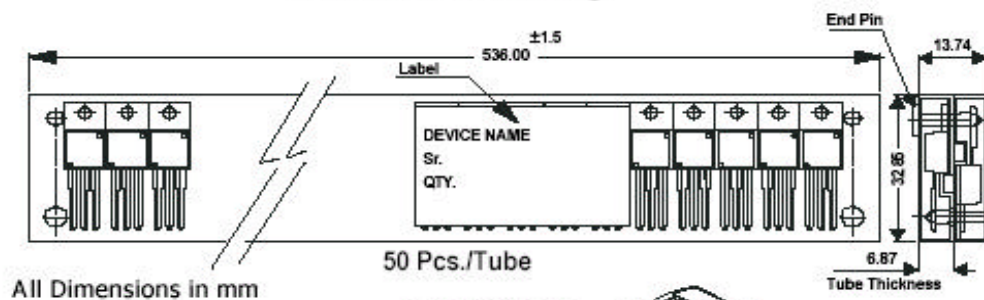

AMMO PACK SIZE

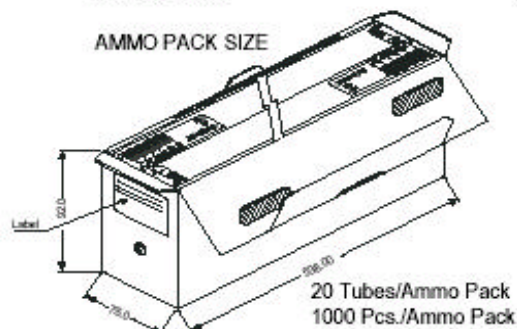

Packing Detail

PACKAGE	STANDARD PACK		INNER CARTON BOX		OUTER CARTON BOX		
	Details	Net Weight/Qty	Size	Qty	Size	Qty	Gr Wt
TO-220	200 pcs/polybag	396 gm/200 pcs	3" x 7.5" x 7.5"	1.0K	17" x 15" x 13.5"	16.0K	36 kgs
	50 pcs/tube	120 gm/50 pcs	3.5" x 3.7" x 21.5"	1.0K	19" x 19" x 19"	10.0K	29 kgs

Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of
Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.

Telephone + 91-11-2579 6150, 5141 1112 Fax + 91-11-2579 5290, 5141 1119

email@cdil.com www.cdilsemi.com