


COMPLEMENTARY DARLINGTON PLASTIC POWER TRANSISTORS

MJD122 NPN
MJD127 PNP

DPAK (TO-252)
Plastic Package



PIN CONFIGURATION

1. BASE
2. COLLECTOR
3. EMITTER

Designed for General Purpose Amplifier and Low Speed Switching Applications

ABSOLUTE MAXIMUM RATINGS

DESCRIPTION	SYMBOL	VALUE	UNIT
Collector Base Voltage	V_{CBO}	100	V
Collector Emitter Voltage	V_{CEO}	100	V
Emitter Base Voltage	V_{EBO}	5	V
Collector Current Continuous	I_C	8	A
Collector Current Peak	I_C	16	A
Base Current	I_B	120	mA
Total Power Dissipation $T_c=25^\circ\text{C}$ Derate Above 25°C	P_D	20 0.16	W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_j, T_{stg}	- 65 to +150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

Junction to Case	$R_{th(j-c)}$	6.25	$^\circ\text{C/W}$
------------------	---------------	------	--------------------

ELECTRICAL CHARACTERISTICS ($T_c=25^\circ\text{C}$ unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Collector Emitter Sustaining Voltage	V_{CEO}	$I_C=30\text{mA}, I_B=0$	100			V
Collector Cut Off Current	I_{CEO}	$V_{CE}=50\text{V}, I_B=0$			10	μA
Collector Cut Off Current	I_{CBO}	$V_{CB}=100\text{V}, I_E=0$			10	μA
Emitter Cut Off Current	I_{EBO}	$V_{EB}=5\text{V}, I_C=0$			2	mA
DC Current Gain	h_{FE}	$I_C=4\text{A}, V_{CE}=4\text{V}$ $I_C=8\text{A}, V_{CE}=4\text{V}$	1000 100		12000	
Collector Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=4\text{A}, I_B=16\text{mA}$ $I_C=8\text{A}, I_B=80\text{mA}$			2 4	V V
Base Emitter Saturation Voltage	$*V_{BE(sat)}$	$I_C=8\text{A}, I_B=80\text{mA}$			4.5	V
Base Emitter On Voltage	$V_{BE(on)}$	$I_C=4\text{A}, V_{CE}=4\text{V}$			2.8	V


DYNAMIC CHARACTERISTICS

Current Gain Bandwidth product	$ h_{fe} $	$V_{CE}=4\text{V}, I_C=3\text{A}, f=1\text{MHz}$	4			MHz
Output Capacitance	C_{ob}	$I_E=0, V_{CB}=10\text{V}, f=0.1\text{MHz}$ MJD127 MJD122			300 200	pF pF
Small Signal Current Gain	h_{fe}	$I_C=3\text{A}, V_{CE}=4\text{V}, f=1\text{kHz}$	300			


*Pulse test: Pulse width $\leq 300\text{ms}$, duty cycle $\leq 2\%$


MJD122_127 Rev290704E

PACKAGE DPAK

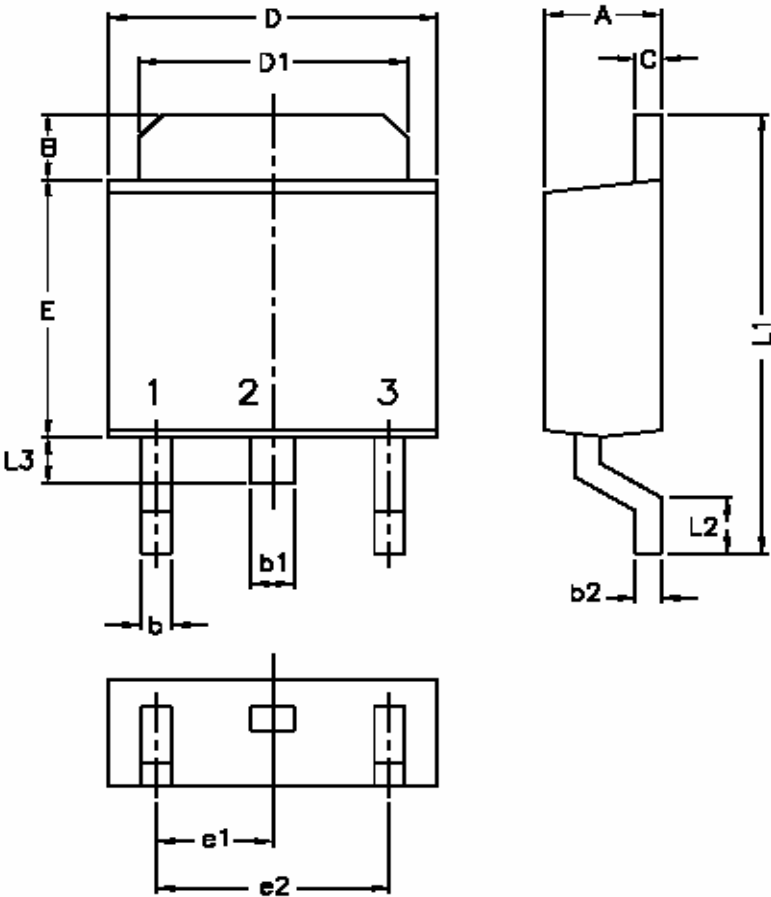


DIM	MIN.	MAX.
A	2.18	2.43
B	0.889	1.50
b	0.550	0.889
b1	0.75	0.85
b2	0.46	0.56
C	0.46	0.56
D	6.35	6.75
D1	4.95	5.46
E	5.40	6.22
e1	2.25	2.35
e2	4.50	4.70
L1	9.25	9.75
L2	0.5	—
L3	0.90	1.10

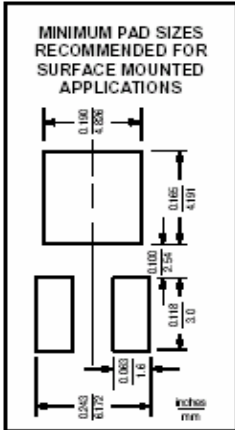

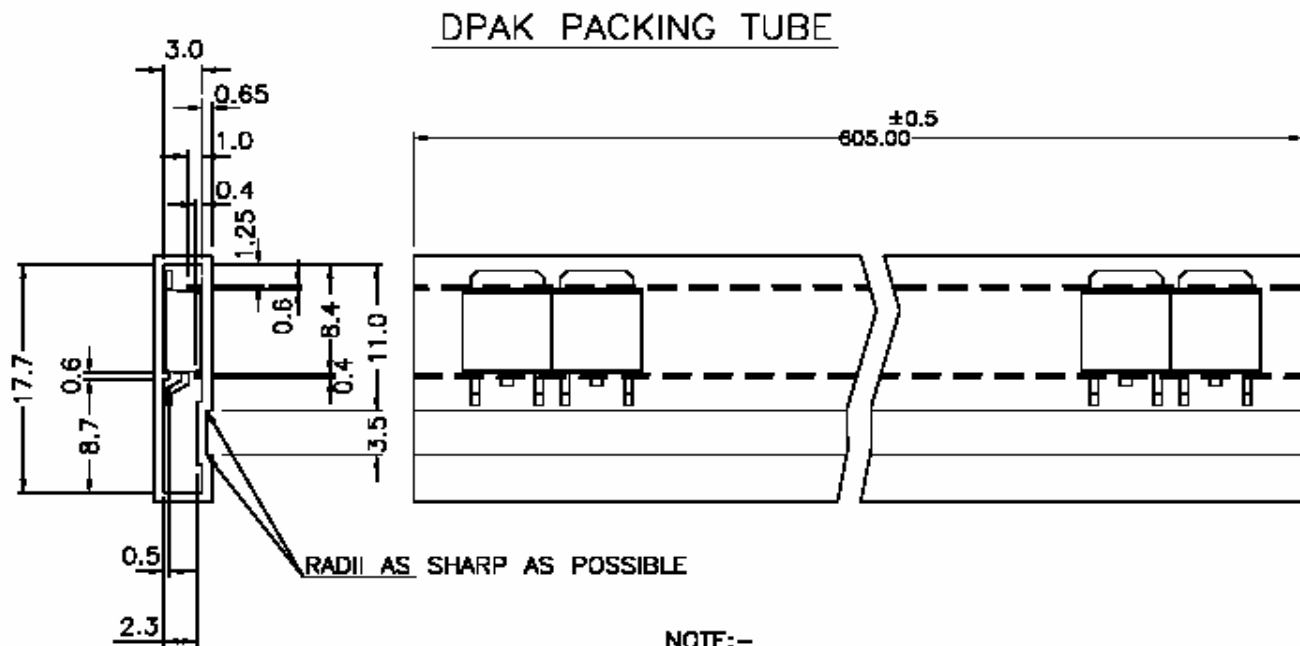


NOTE:—
80 Pcs/TUBE
2.5 K/REEL
ALL DIMENSIONS ARE IN mm

DPAK TAPE & REEL SPECIFICATION

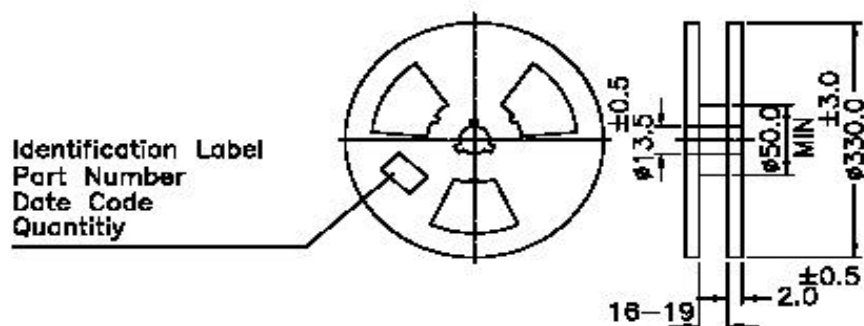


ALL DIMENSIONS ARE IN mm
REEL ϕ 330 mm (13")
No of Device 2500

TAPE & REEL

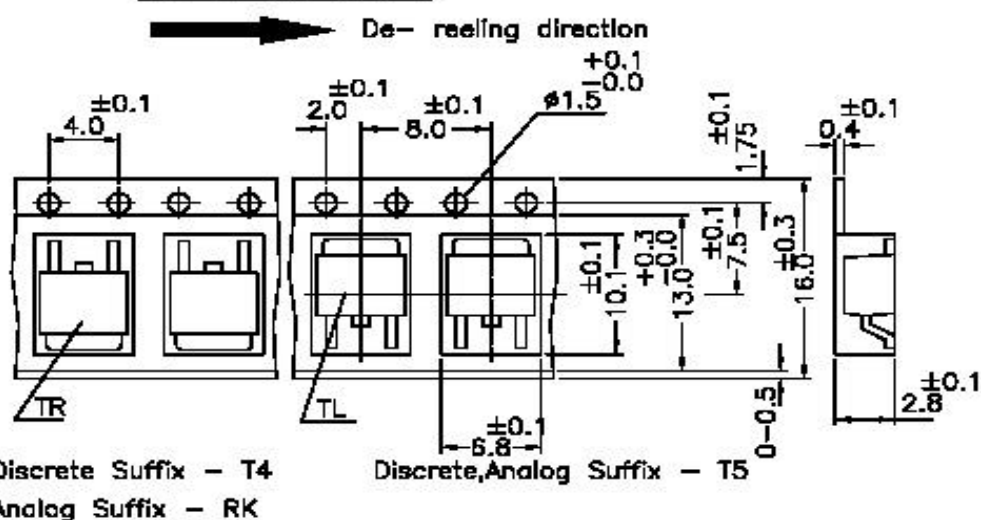

Notes:-

A maximum of three consecutive components may be missing. Provided this gap is followed by six consecutive components.

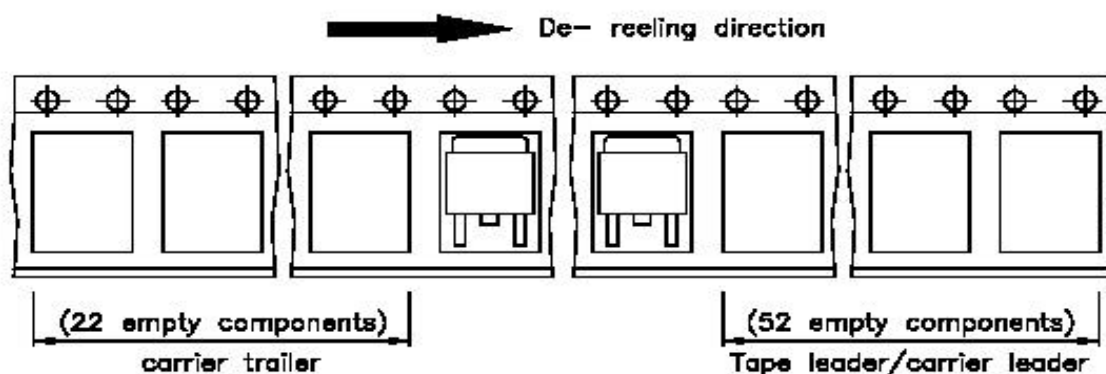

Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of
Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.
Telephone + 91-11-2579 6150, 4141 1112 Fax + 91-11-2579 5290, 4141 1119
email@cdil.com www.cdilsemi.com